

3 CONDUCTOR  
PLUG 2X

1.90  
REF

0.015

OVERMOLDED HANDLE

"A"

Ø0.173

Ø0.300

SEE TABLE FOR COLOR  
CABLE

TT

X

**BANTAM TT  
MOLDED PLUG**

**RoHS COMPLIANT**

**CABLE LENGTH**


**CABLE JACKET COLOR**

- 1 = 1 FOOT LONG ±1"
- 2 = 2 FEET LONG ±1"
- 3 = 3 FEET LONG ±1"
- 4 = 4 FEET LONG ±1"
- 5 = 5 FEET LONG ±1"
- 6 = 6 FEET LONG ±2"
- 7 = 7 FEET LONG ±2"
- 8 = 8 FEET LONG ±2"
- 9 = 9 FEET LONG ±2"
- 10 = 10 FEET LONG ±2"
- B** 16 = 16 FEET LONG ±2"
- B** 22 = 22 FEET LONG ±2"

- BK = BLACK
- BL = BLUE
- GN = GREEN
- GY = GRAY
- O = ORANGE
- P = PURPLE
- R = RED
- Y = YELLOW

**CUSTOMER DRAWING**

WIRING DIAGRAM

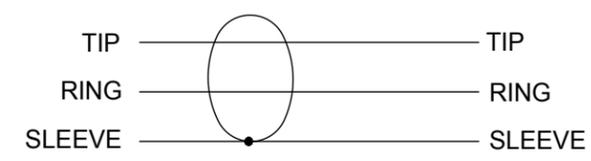

NOTES:

1. CABLE: 2 CONDUCTOR, 26 AWG, SPIRAL SHIELD  
MATTE PVC JACKET, COLOR - SEE TABLE
2. OVERMOLDED HANDLE: VINYL, BLACK COLOR FOR ALL  
COLOR CABLES
3. PLUG: 3 CONDUCTOR TT PLUG, BRASS, NICKEL PLATED
4. THIS PRODUCT IS RoHS COMPLIANT.

REV	ECO NUMBER	DATE	BY	APVD
B	27050	10-26-12	TO	TJK
A	26006	03/09/06	TJK	TJK
REVISIONS				

UNLESS OTHERWISE SPECIFIED

1. ALL DIMENSIONS IN INCHES

- TWO PLACE DECIMALS ±0.02

- THREE PLACE DECIMALS ±0.005

**DO NOT SCALE DRAWING**

THIS DRAWING DESCRIBES A DESIGN CONSIDERED PROPRIETARY IN NATURE, DEVELOPED AND MANUFACTURED BY SWITCHCRAFT INC. AND IS RELEASED ON A CONFIDENTIAL BASIS FOR IDENTIFICATION PURPOSES ONLY.									
SIZE	WIDTH	MULT	LBS/M	TEMPER					
FINISH					MATERIAL				
SPEC No.					SPEC No.				
FIRST USED ON					SCALE				
					2:1				
DATE DRAWN	BY	CHKD	APVD						
03/09/09	TJK	TJK	TJK						
			03/09/06	03/09/06					
NAME TT SINGLE, 3 CONDUCTOR PATCH CORD, RoHS								PART No.	REV
								TT1__X-TT22__X	<b>B</b>

**SolidWorks CAD File** **B**