



# Basic Switch Common Accessories

## Separator (Sold Separately)

To ensure a secure insulation distance, or if there are other metal parts or copper wire installed too close to the Switch, use a separator purchased separately to keep the insulation distance.


### List of models

Appearance	Applicable Switches	Thickness (mm)	Model
	V D3V-01 VX D2RV D2VW	0.13	SEPARATOR FOR V T0.13
	SS SS-P D2S D2SW D2SW-P	0.13	SEPARATOR FOR SS T0.13


Note. The Separator is made of insulating cloth.

### Dimensions (Unit: mm)

#### SEPARATOR FOR V T0.13

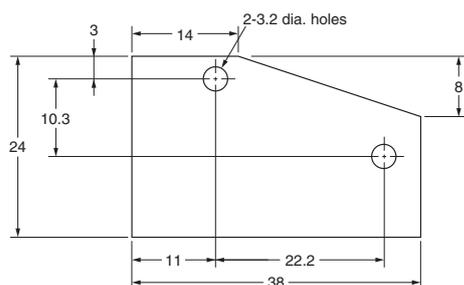

#### SEPARATOR FOR SS T0.13



Note. The dimensions in the above outline drawings are reference values.

# Basic Switch Common Accessories

## Actuator (Sold Separately)


Actuators are supplementary components used when operating the Switch using cams or dogs or when transmitting mechanical movements that are not in alignment with the switch plunger.

The VAL models are suitable for cases where a Switch is operated by a rotary cam or sliding devices with relatively low operation frequency.

The VAM models are designed to operate in reverse movements and have high shock and vibration resistance. Since the Overtravel (OT) of these models is rather large, they can be used for automatic control or door switches of machining tools.

The VAV models can be used where a small Operating Force (OF) is required.

**These Actuators do not include Switches.**






Note. Switches with the mounting holes shown in the diagram can be used except for special models.

## ■Dimensions (Unit: mm) / Operating Characteristics

\* Model numbers are for the Actuators only.

The value given for operating characteristics are reference values. For operating characteristics of models not listed above, consult your OMRON sales representative.




### ●Leaf Spring Model VAL

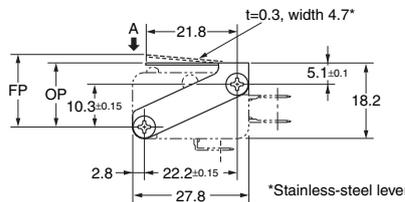

Operating characteristics		In the case of V-15-1A5
Operating Force	OF Max.	2.26 N {230 gf}
Releasing Force	RF Min.	0.49 N {50 gf}
Overtravel	OT Min.	0.8 mm
Movement Differential	MD Max.	0.4 mm
Free Position	FP Max.	17 mm
Operating Position	OP	14.9±0.5 mm

Note. Pin plunger (Designed for models of OF 1.96 N {200 gf} or greater).




### ●Simulated Leaf Spring VAL12

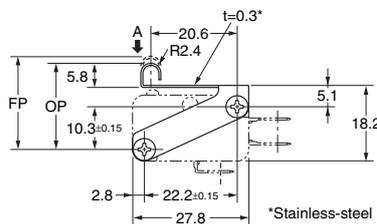

Operating characteristics		In the case of V-15-1A5
Operating Force	OF Max.	2.26 N {230 gf}
Releasing Force	RF Min.	0.49 N {50 gf}
Overtravel	OT Min.	0.8 mm
Movement Differential	MD Max.	0.4 mm
Free Position	FP Max.	22.9 mm
Operating Position	OP	20.5±0.8 mm

Note. Pin plunger (Designed for models of OF 1.96 N {200 gf} or greater).

### ●Roller Leaf Spring VAL2 VAL02

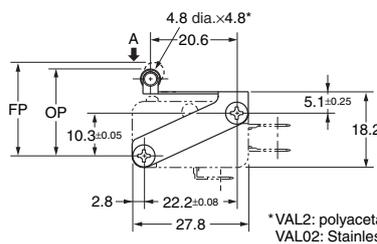

Operating characteristics		In the case of V-15-1A5
Operating Force	OF Max.	2.26 N {230 gf}
Releasing Force	RF Min.	0.49 N {50 gf}
Overtravel	OT Min.	0.8 mm
Movement Differential	MD Max.	0.4 mm
Free Position	FP Max.	22.6 mm
Operating Position	OP	20.5±0.5 mm


Note. Pin plunger (Designed for models of OF 1.96 N {200 gf} or greater).

Note1. Unless otherwise specified, a tolerance of ±0.4mm applies to all dimensions.

Note2. The operating characteristics are for operation in the A direction (↓).

# Basic Switch Common Accessories


## ●Long Hinge Lever VAV

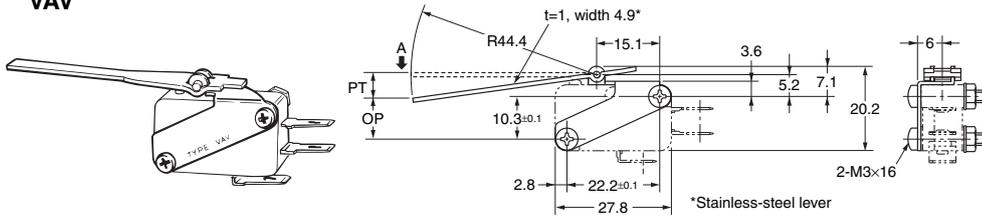

Operating characteristics		In the case of V-15-1A5
Operating Force	OF Max.	0.34 N {35 gf}
Releasing Force	RF Min.	0.04 N {4 gf}
Pretravel	PT Max.	7.6 mm
Overtravel	OT Min.	3.6 mm
Movement Differential	MD Max.	4.7 mm
Operating Position	OP	Approx. 10.6 mm

Note. Pin plunger designed for models of OF 0.98 N {100 gf} or greater.  
Use in direction where the lever does not apply its own weight load to the plunger.


## ●Hinge Wire Lever VAV-5

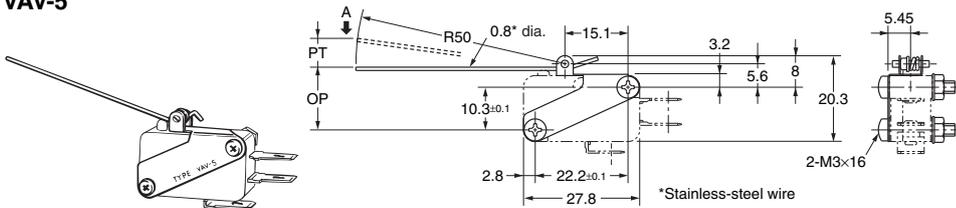

Operating characteristics		In the case of VX-5-1A2
Operating Force	OF Max.	0.03 N {3 gf}
Pretravel	PT Max.	16 mm
Overtravel	OT Min.	2 mm
Movement Differential	MD Max.	5 mm
Operating Position	OP	Approx. 16.7 mm

Note. This is designed for model of OF 0.25 N {25 gf}.  
Use in direction where the lever does not apply its own weight load to the plunger.


## ●Hinge Roller Lever VAV2

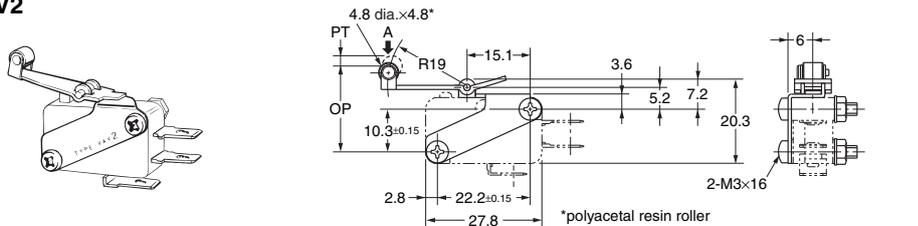

Operating characteristics		In the case of V-15-1A5
Operating Force	OF Max.	0.74 N {75 gf}
Releasing Force	RF Min.	0.09 N {9 gf}
Pretravel	PT Max.	4.8 mm
Overtravel	OT Min.	1.5 mm
Movement Differential	MD Max.	1.2 mm
Operating Position	OP	18.6±1.6 mm

Note. Pin plunger designed for models of OF 0.98 N {100 gf} or greater.  
Use in direction where the lever does not apply its own weight load to the plunger.


## ●Reverse Long Hinge Lever VAM

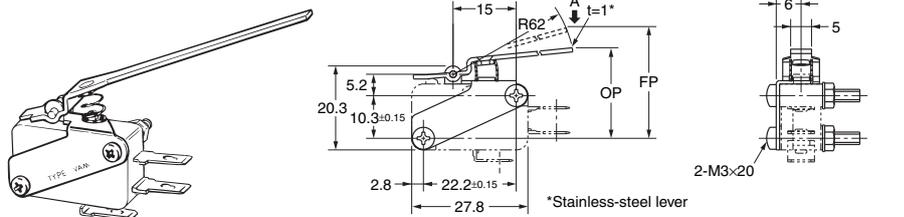

Operating characteristics		In the case of V-15-1A5
Operating Force	OF Max.	1.96 N {200 gf}
Releasing Force	RF Min.	0.29 N {30 gf}
Overtravel	OT Min.	7mm (reference value)
Movement Differential	MD Max.	5mm
Free Position	FP Max.	45 mm
Operating Position	OP	20±9 mm

Note. Not available for D2VW.

## ●Reverse Hinge Lever VAM21

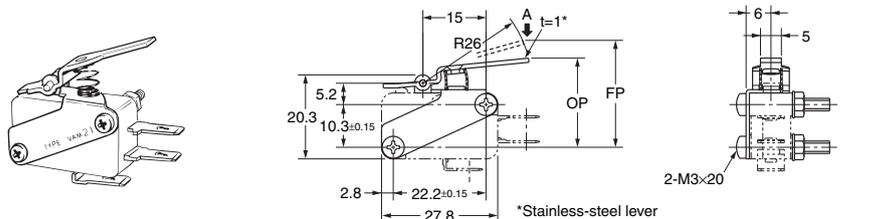

Operating characteristics		In the case of V-15-1A5
Operating Force	OF Max.	3.53 N {360 gf}
Releasing Force	RF Min.	0.69 N {70 gf}
Overtravel	OT Min.	5 mm (reference value)
Movement Differential	MD Max.	4 mm
Free Position	FP Max.	30 mm
Operating Position	OP	20±4 mm



Note. Not available for D2VW.

Note1. Unless otherwise specified, a tolerance of ±0.4mm applies to all dimensions.

Note2. The operating characteristics are for operation in the A direction (↓).

# Basic Switch Common Accessories



## ● Reverse Hinge Modified Lever VAM-1

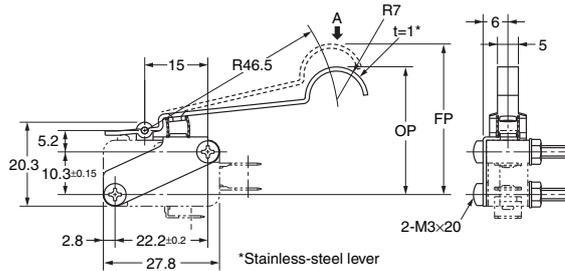

Operating characteristics		In the case of V-15-1A5
Operating Force	OF Max.	2.94 N {300 gf}
Releasing Force	RF Min.	0.39 N {40 gf}
Overtravel	OT Min.	5 mm (reference value)
Movement Differential	MD Max.	6 mm
Free Position	FP Max.	47 mm
Operating Position	OP	30±5 mm

Note. Not available for D2VW.



## ● Reverse Roller Modified Lever VAM22

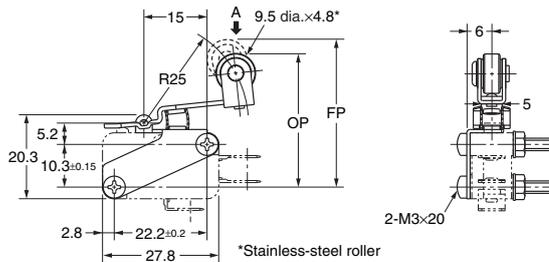

Operating characteristics		In the case of V-15-1A5
Operating Force	OF Max.	3.53 N {360 gf}
Releasing Force	RF Min.	0.69 N {70 gf}
Overtravel	OT Min.	3 mm (reference value)
Movement Differential	MD Max.	4 mm
Free Position	FP Max.	38 mm
Operating Position	OP	31±3 mm

Note. Not available for D2VW.

## ● Reverse Long Hinge Roller Lever VAM2

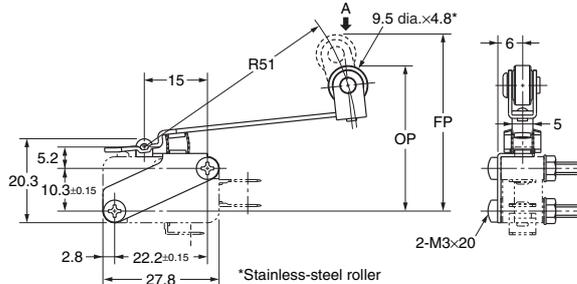

Operating characteristics		In the case of V-15-1A5
Operating Force	OF Max.	2.45 N {250 gf}
Releasing Force	RF Min.	0.39 N {40 gf}
Overtravel	OT Min.	7 mm (reference value)
Movement Differential	MD Max.	6 mm
Free Position	FP Max.	48 mm
Operating Position	OP	31±6 mm

Note. Not available for D2VW.

Note1. Unless otherwise specified, a tolerance of ±0.4mm applies to all dimensions.

Note2. The operating characteristics are for operation in the A direction (↓).

Please check each region's Terms & Conditions by region website.

## OMRON Corporation Device & Module Solutions Company

### Regional Contact

#### Americas

<https://components.omron.com/us>

#### Asia-Pacific

<https://components.omron.com/ap>

#### Korea

<https://components.omron.com/kr>

#### Europe

<https://components.omron.com/eu>

#### China

<https://components.omron.com.cn>

#### Japan

<https://components.omron.com/jp>

© OMRON Corporation 2007-2022 All Rights Reserved.

In the interest of product improvement, specifications are subject to change without notice.

Cat. No. B118-E1-04

0922 (0207)