

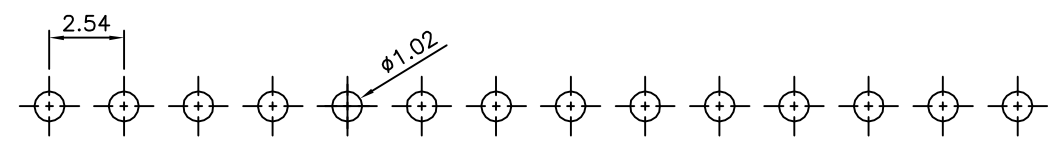
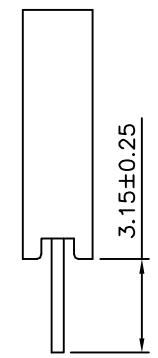


SPECIFICATION
 Current Rating:3.0 Amp
 Withstand Voltage:500V AC/DC
 Insulator Resistance:1000 Megaohms Min.
 Contact Resistance:20 Milliohms Max.
 Operation Temperature:-40°C~+105°C
 Contact:Brass,Gold Plated Over Nickel
 ⚠ Insulator:PA6T+30%G.F(UL94V-0),Black
 RoHS Compliant

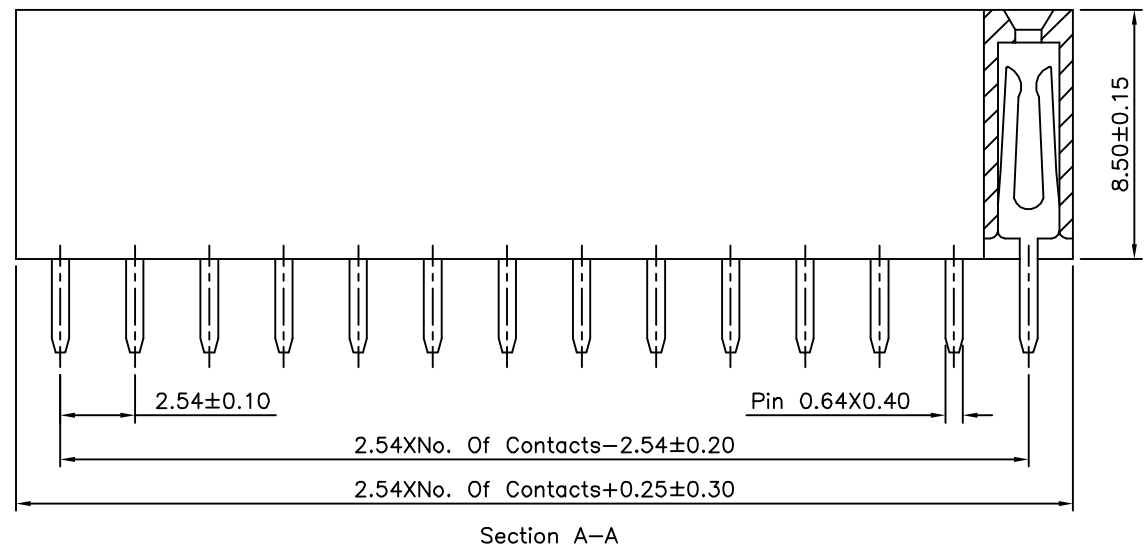

Recommended P.C.B Layout(Top Side)
 (PCB Board Tolerance ± 0.05)

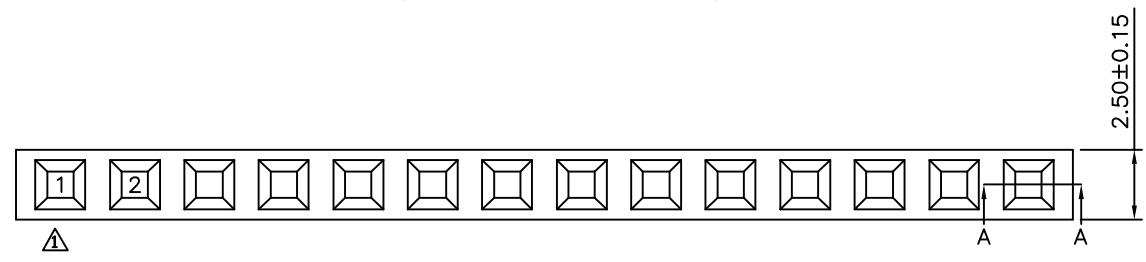

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ± 0.40 .XX ± 0.25 .XXX ± 0.15 ANG. $\pm 3^\circ$
00527		EMILY		
		CHECKED BY HZF		
		DRAWING BY SONG		
SCALE	NONE	REV.	A1	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
⚠ A1		Modify Data	HZF	07/28/2011
⚠ A0		NEW RELEASE	HZF	09/05/2008