

2N4402

PNP General Purpose Amplifier

Features

- Halogen free available upon request by adding suffix "-HF"
- This device is designed for use as general purpose amplifiers and switches requiring collector currents to 500mA
- Epoxy meets UL 94 V-0 flammability rating
- Moisture Sensitivity Level 1
- Marking: Type number
- Lead Free Finish/Rohs Compliant ("P" Suffix designates Compliant. See ordering information)

Maximum Ratings*

| Symbol | Rating | Rating | Unit |
|-----------|--------------------------------|-------------|------|
| V_{CE0} | Collector-Emitter Voltage | 40 | V |
| V_{CBO} | Collector-Base Voltage | 40 | V |
| V_{EBO} | Emitter-Base Voltage | 5.0 | V |
| I_C | Collector Current, Continuous | 600 | mA |
| T_J | Operating Junction Temperature | -55 to +150 | °C |
| T_{STG} | Storage Temperature | -55 to +150 | °C |

Thermal Characteristics

| Symbol | Rating | Max | Unit |
|----------|---|------------|-------------|
| P_D | Total Device Dissipation Derate above 25°C | 625 5.0 | mW mW/°C |
| R_{JC} | Thermal Resistance, Junction to Case | 83.3 | °C/W |
| R_{JA} | Thermal Resistance, Junction to Ambient | 200 | °C/W |

Electrical Characteristics @ 25°C Unless Otherwise Specified

| Symbol | Parameter | Min | Max | Units |
|--------|-----------|-----|-----|-------|
|--------|-----------|-----|-----|-------|


OFF CHARACTERISTICS

| | | | | |
|---------------|---|-----|-----|------------|
| $V_{(BR)CEO}$ | Collector-Emitter Breakdown Voltage* ($I_C=1.0mA$, $I_B=0$) | 40 | --- | Vdc |
| $V_{(BR)CBO}$ | Collector-Base Breakdown Voltage ($I_C=100\mu A$, $I_E=0$) | 40 | --- | Vdc |
| $V_{(BR)EBO}$ | Emitter-Base Breakdown Voltage ($I_E=100\mu A$, $I_C=0$) | 5.0 | --- | Vdc |
| I_{CEX} | Collector Cutoff Current ($V_{CE}=35Vdc$, $V_{EB}=0.4Vdc$) | --- | 0.1 | μA dc |
| I_{BL} | Base Cutoff Current ($V_{CE}=35Vdc$, $V_{EB}=0.4Vdc$) | --- | 0.1 | μA dc |

* These ratings are limiting values above which the serviceability of any semiconductor device may be impaired.

Notes: 1. These ratings are based on a maximum junction temperature of 150 degrees C.

2. These are steady state limits. The factory should be consulted on applications involving pulsed or low duty cycle operations.

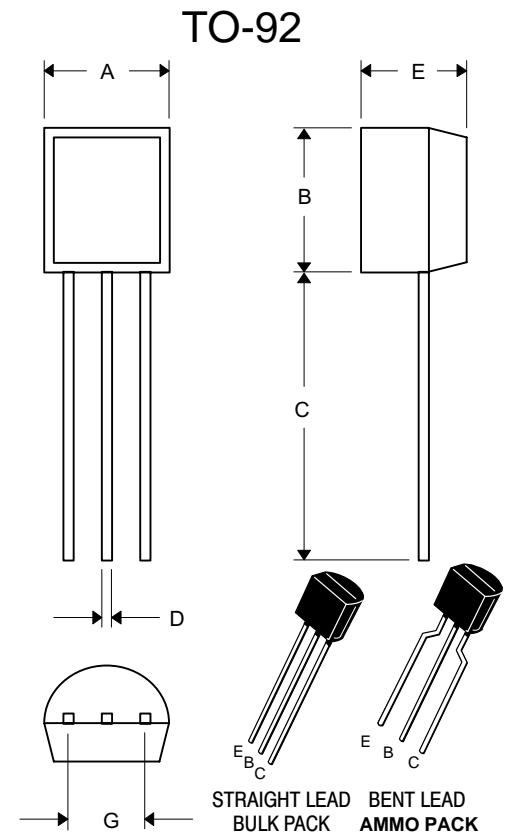

DIMENSIONS

| DIM | INCHES | | MM | | NOTE |
|-----|--------|------|-------|------|---------------|
| | MIN | MAX | MIN | MAX | |
| A | .175 | .185 | 4.45 | 4.70 | |
| B | .175 | .185 | 4.45 | 4.70 | |
| C | .500 | --- | 12.70 | --- | |
| D | .016 | .020 | 0.41 | 0.63 | |
| E | .135 | .145 | 3.43 | 3.68 | |
| G | .095 | .105 | 2.42 | 2.67 | Straight Lead |
| | .173 | .220 | 4.40 | 5.60 | Bent Lead |

* For ammo packing detailed specification, click here to visit our website of product packaging for details.

2N4402



Micro Commercial Components

| Symbol | Parameter | Min | Max | Units |
|--------|-----------|-----|-----|-------|
|--------|-----------|-----|-----|-------|

ON CHARACTERISTICS*

| | | | | |
|---------------|--|----------------------|--------------|------------|
| h_{FE} | DC Current Gain ($V_{CE}=1.0Vdc, I_C=1.0mA$) ($V_{CE}=1.0Vdc, I_C=10mA$) ($V_{CE}=2.0Vdc, I_C=150mA$) ($V_{CE}=2.0Vdc, I_C=500mA$) | 30 50 50 20 | 150 | --- |
| $V_{CE(sat)}$ | Collector-Emitter Saturation Voltage ($I_C=150mA, I_B=15mA$) ($I_C=500mA, I_B=50mA$) | --- --- | 0.40 0.75 | Vdc Vdc |
| $V_{BE(sat)}$ | Base-Emitter Saturation Voltage ($I_C=150mA, I_B=15mA$) ($I_C=500mA, I_B=50mA$) | 0.75 | 0.95 1.30 | Vdc Vdc |

SMALL-SIGNAL CHARACTERISTICS







| | | | | |
|----------|--|------|-----|------------------|
| C_{OB} | Output Capacitance ($V_{CB}=10Vdc, f=140KHz$) | --- | 8.5 | pF |
| C_{IB} | Input Capacitance ($V_{EB}=0.5Vdc, f=140KHz$) | --- | 30 | pF |
| h_{fe} | Small-Signal Current Gain ($I_C=20mA, V_{CE}=10Vdc, f=100MHz$) | 1.5 | --- | --- |
| h_{fe} | Small-Signal Current Gain ($I_C=1.0mA, V_{CE}=10Vdc, f=1.0KHz$) | 30 | 250 | --- |
| h_{ie} | Small-Signal Current Gain ($I_C=1.0mA, V_{CE}=10Vdc, f=1.0KHz$) | 0.75 | 7.5 | KOHM |
| h_{re} | Small-Signal Current Gain ($I_C=1.0mA, V_{CE}=10Vdc, f=1.0KHz$) | 0.10 | 8.0 | $\times 10^{-4}$ |
| h_{oe} | Small-Signal Current Gain ($I_C=1.0mA, V_{CE}=10Vdc, f=1.0KHz$) | 1.0 | 100 | umhos |

SWITCHING CHARACTERISTICS

| | | | | | |
|-------|--------------|---|-----|-----|----|
| T_d | Delay Time | $V_{CC}=30Vdc, I_C=150mA,$ $I_{B1}=15mA, V_{BE(off)}=2.0Vdc$ | --- | 15 | ns |
| t_r | Rise Time | | --- | 20 | ns |
| t_s | Storage Time | $V_{CC}=30Vdc, I_C=150mA,$ $I_{B1}=I_{B2}=15mA$ | --- | 225 | ns |
| t_f | Fall Time | | --- | 30 | ns |


* Pulse Test: Pulse Width<300us, Duty Cycle<2.0%



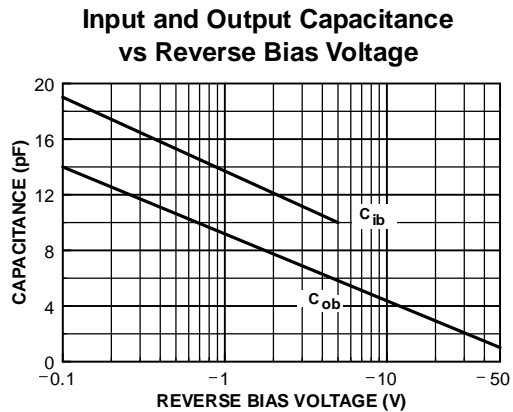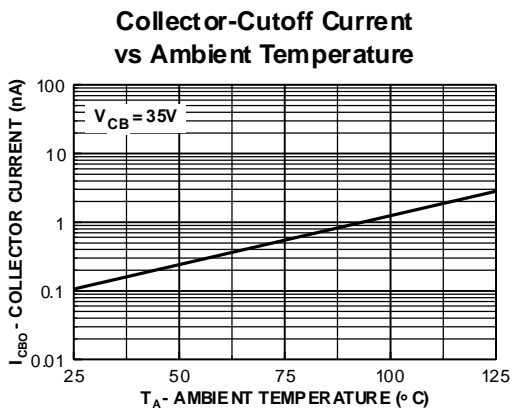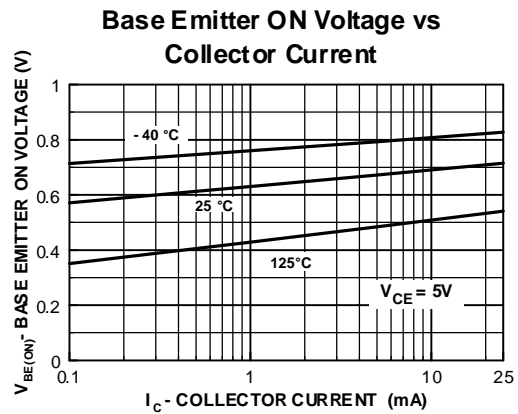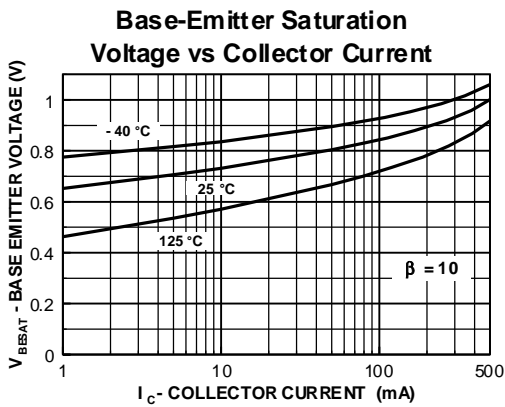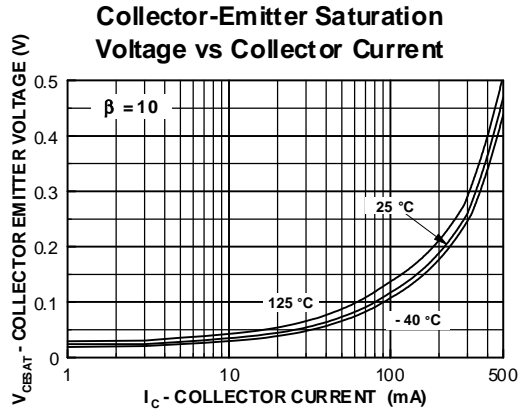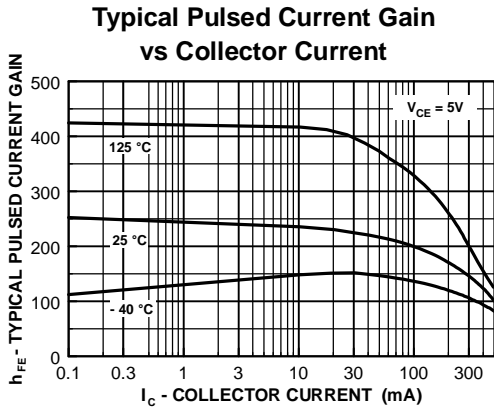


2N4402


Switching Times vs Collector Current

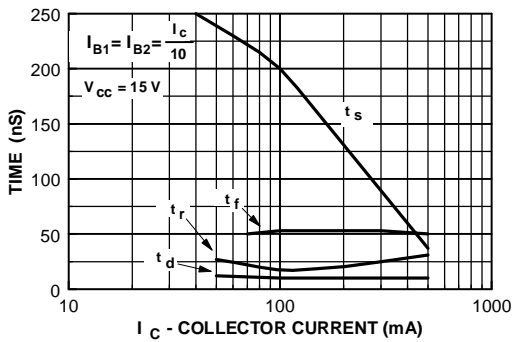


Turn On and Turn Off Times vs Collector Current

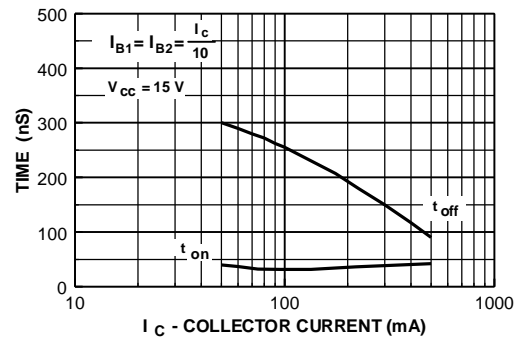

Rise Time vs Collector and Turn On Base Currents

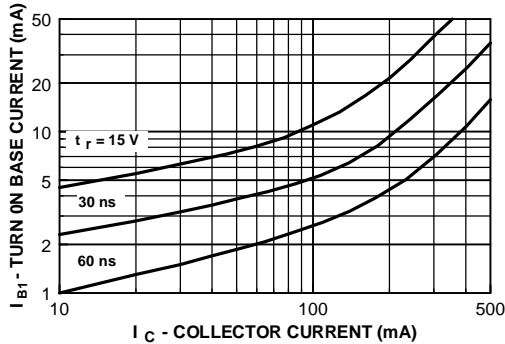

Power Dissipation vs Ambient Temperature

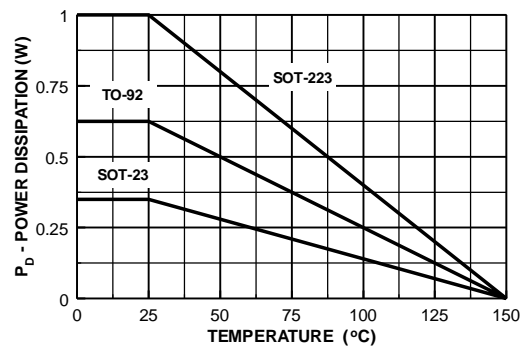

Ordering Information :

| Device | Packing |
|----------------|-----------------------------|
| Part Number-AP | Ammo Packing: 20Kpcs/Carton |
| Part Number-BP | Bulk: 100Kpcs/Carton |

Note : Adding "-HF" suffix for halogen free, eg. Part Number-AP-HF

*****IMPORTANT NOTICE*****

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. **Micro Commercial Components Corp.** does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold **Micro Commercial Components Corp.** and all the companies whose products are represented on our website, harmless against all damages.

*****LIFE SUPPORT*****

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

*****CUSTOMER AWARENESS*****

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. **MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources.** MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.