
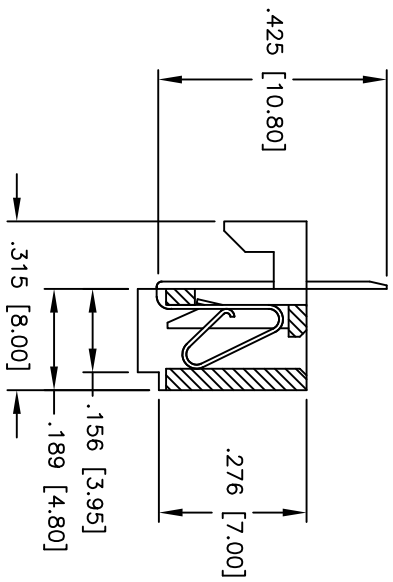
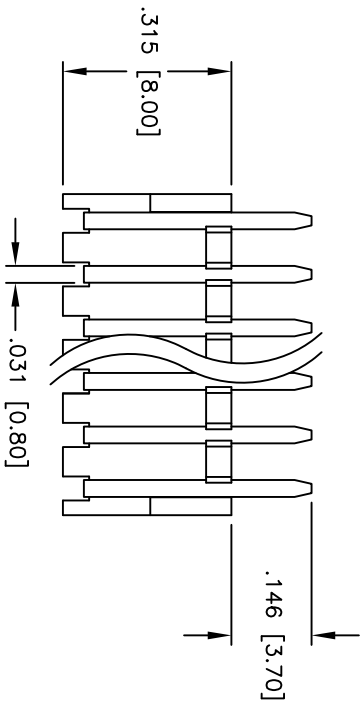
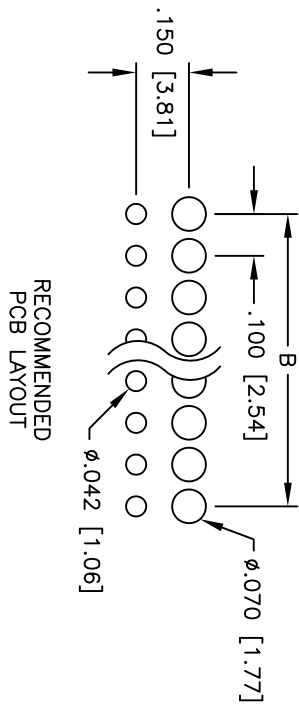


| Rev | AWO # | Description | Date   | Appr |
|-----|-------|-------------|--------|------|
| -   |       | RELEASED    | 6/2/05 |      |

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

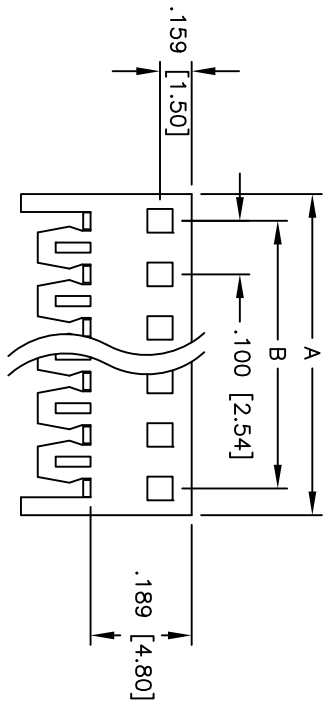

Positions: 02 thru 20  
 A = .100 [2.54] x No. of Positions  
 B = .100 [2.54] x No. of Spaces

**SPECIFICATIONS:**

- Material: Insulator: Nylon 66, rated UL 94V-0
- Insulator color: Natural
- Contacts: Phosphor Bronze
- Plating: Tin over Copper underplate overall
- Electrical: Operating voltage: 250 VAC max. Current rating: 3 Amps max. Contact resistance: 10 mohms max. initial Insulation resistance: 1,000 Mohms min. Dielectric withstanding voltage: 1,500 VAC for 1 minute
- Mechanical: Recommended PCB thickness: 0.063" (1.60mm)
- Temperature Rating: Operating temperature: -40°C to +105°C
- Environmental: Lead free, RoHS compliant

|                                   |              |
|-----------------------------------|--------------|
| UNLESS OTHERWISE SPECIFIED        |              |
| ALL DIMENSIONS ARE IN INCHES [MM] |              |
| TOLERANCES: EXCEPT AS NOTED       |              |
| INCHES                            | HOLDS        |
| .X ± .10                          | ØXX ± .10    |
| .XX ± .020                        | ØXXX ± .015  |
| .XXX ± .015                       | ØXXXX ± .010 |
| APPROVALS                         | DATE         |
| DRAWN                             | SS           |
| CHECKED                           |              |
| APPROVED                          |              |

**ADAM TECH**  
 909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .100 [2.54] PCB CONNECTOR BOARD HOOKS, BOTTOM ENTRY

|      |            |              |
|------|------------|--------------|
| SIZE | PART NO.   | REV.         |
| X    | PCE-C-XX   | -            |
| REF: | SCALE: NTS | SHEET 1 OF 1 |

